




	e20	e30	e40	e50	e60	e100	e200	e300	e400	e600	e800	e1000
H (mm)	676	789	939	1090	1238	1870	1870	1870	1870	1870	1870	1870
W (mm)	750	750	750	750	750	750	1030	1810	2060	3090	4120	5150
D (mm)	165	165	165	165	165	165	180	180	180	180	180	180
W (kg)	39	41	52	60	68	95	121	191	217	313	409	505

System Materials	1.5mm Mild Steel
Colour	RAL 7016, Anthracite Grey
Door Options	Clear polycarbonate, dark transparent, solid steel
eFOBs	RFiD
LEDs	Multi-Colour
Operating Temperature (°C)	-10 to max +60
Power Supply (v)	110 - 240
Max Power Consumption	2.5 Amps
Battery Backup (8 Hours)	5.4 Ah Lead Acid
System Access	PIN, RFiD, Fingerprint
Interface	10" Touchscreen display
Users Per System	10,000 Per Application
Communications	Ethernet, WiFi, 4G
Mounting	Wall Mounted
Manual Override	Mechanical & Electronic
Warranty	12 Months
Standards	CE, UKCA & FCC



Architecture

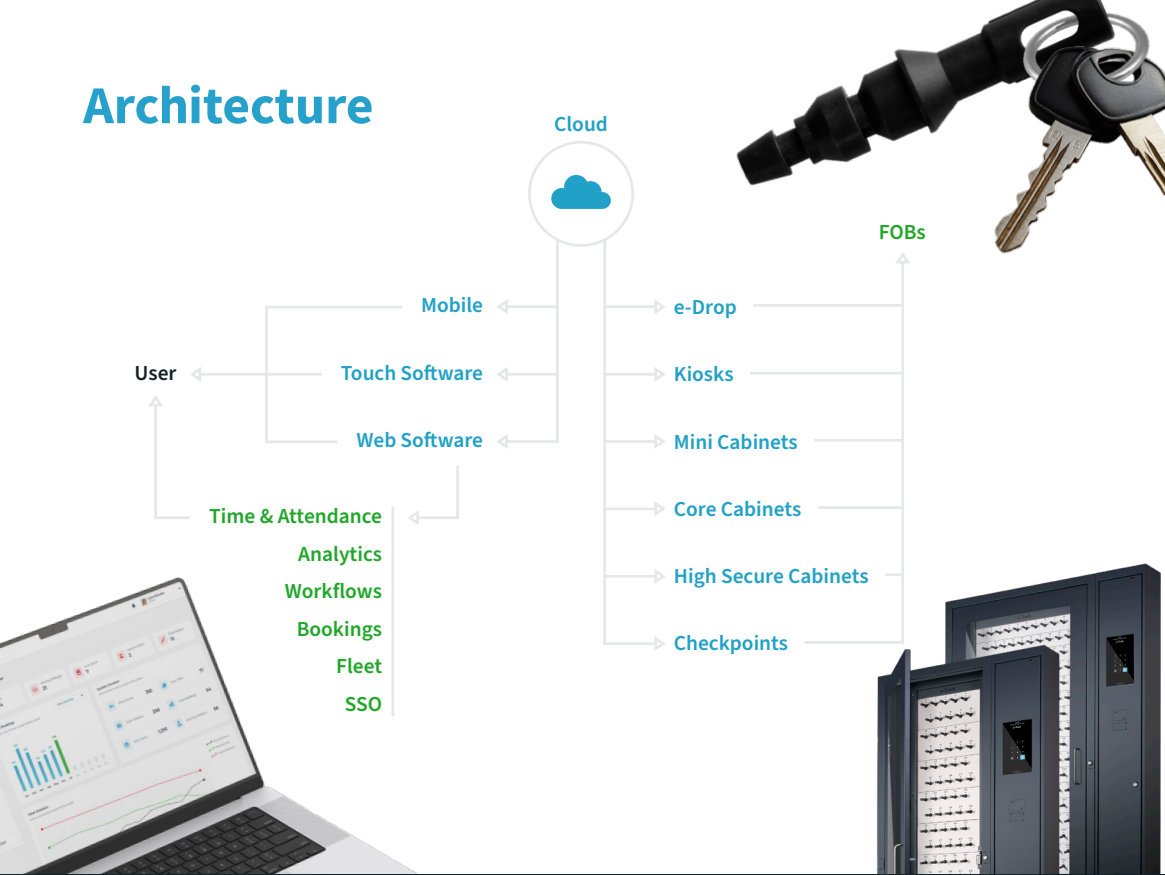

Features:

- Magnetic Locks
- Multi-colour LEDs
- Off-set Key Positions
- Networked Cabinets
- Multi-site Management
- API & Webhooks
- 3rd Party Integrations
- Analytics
- Mobile Key Booking
- Easy to use Web Software
- User Group Access Levels
- Low Service & Maintenance
- 4G Connectivity
- Offline Mode
- Battery Backup

Benefits:

- Complete Transparency
- Increased Efficiency
- Improved Job Satisfaction
- Minimised Risks
- Full Compliance
- Organised Key Storage
- Enhanced Security
- Local Control
- Central Overview
- Reduced Admin Costs
- Minimal Training
- Proactive Monitoring